

COLOR SONY SUPER HAD CCD WATER-PROOF CAMERA


ITEM NO:

● POWER SUPPLY

1. Use only with a 12 V DC power supply
2. Be sure to connect each lead to the appropriate terminal. Wrong connection may cause malfunction and / or damage to the video camera

● OPERATING AND STORAGE LOCATIONS

1. Do not attempt to aim the camera at the sun or other extremely bright objects that cause smear to appear irrespective of whether the camera is operating or not. This can damage the CCD(Charge Coupled Device)
2. Do not place the camera in the following locations.
 - Locations subjected to extremely high or low temperatures
 - (Storage temperature range : -20 °C ~ 60 °C +[-4 ° F~+140 ° F])
 - Locations subjected to high levels of humidity and dust.(storage humidity range : max 95 % (no condensation))
 - Locations where there are large amounts of water vapor and steam
 - Locations subjected to excessive vibrations.
3. When this camera is installed near the equipment like wireless communication device which emits strong electromagnetic field, some irregularity such as noise on monitor screen may happen.
4. When plugging the power cord to and electric outlet, be sure to leave enough space around the outlet for easy access to the outlet for later turning the power on and off.

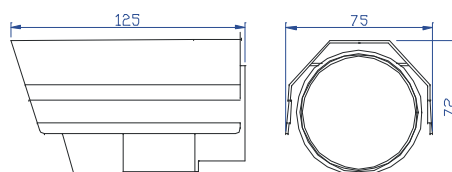

● HANDLING OF THE UNIT

Do not allow the camera to be subjected to strong impacts or shocks.
The camera could be damaged by improper handling or storage

- **Never attempt to disassemble or modify the camera.**
- **If an abnormality should happen to occur, immediately turn off the power and consult your dealer.**

● SPECIFICATIONS

Video Output	1.0Vp-p/75Ohm
Scanning System	2:1 interlace
Resolution	480 horizontal TVL
Minimum Object Illumination	Max. 0 Lux (IR On)
Signal System	PAL/NTSC
S/N Ratio	Min50dB
Gamma characteristics	0.45
Photo Image Sensor	SONY1/3-inch Super HAD CCD
Effective Pixel Count	512(H) x 582(V)
Sync Modes	Internal sync
Iris Control	Video Iris: DC12V,320 MA, image Signal:0.7Vp-p(high impedance)
Power	DC12V ± 20 %
Operating Temperature	-10 °C + 50 °C
External Dimensions	125 x 72 mm
Weight	680g (With Packing)
Lens mount	6mm Board lens